



Safer by design.
The JCB Teletruk Wastemaster Range.



WASTE^{♻️}MASTER

Unrivalled visibility.

JCB Wastemaster Teletruk – The world's only telescopic counterbalance forklift has been tailored to meet the demands of the waste and recycling sector. The Teletruk's unique side mounted boom design provides unrivalled 360° visibility.





Reach straight
to the far side

Eye level
visibility

Up to 2400kg at 2m, or the
other side of a lorry bed

Single side loading.

The Teletruk's unique telescopic forward reach allows you to load and unload trucks from one side against the perimeter fence, saving valuable yard space as well as time as there is no need to reposition the truck. This also improves on-site safety as less forklift movements are required and removes the need to push/pull items across the lorry bed.



4WD option.

Four wheel drive delivers four tonnes of tractive effort that supports bucket work, travelling over rough ground and up 21% gradients. This makes the Teletruk the perfect machine to carry bales, no matter the site or weather conditions.



Wastemaster features and hydrostatic transmission.

All Teletruk in the range benefit from the closed loop hydrostatic drive, delivering precisely the right amount of power to individual wheel motors without the need for a differential or gear-box. The 2wd and 4wd drive Wastemaster Teletruk range includes traction control to support work on poor ground conditions. All machines within the Teletruk Wastemaster range include the 10 features below which ensures the operator and machine are fully protected in this arduous environment.

- 1 Heavy-duty carriage
- 2 Single carriage pin
- 3 Front apron plate
- 4 Front and rear wheel motor protectors
- 5 Heavy-duty body kit, door and underbelly guard
- 6 Wide core radiator
- 7 Fire extinguisher
- 8 Front screen guard and roof guard
- 9 Panoramic mirror
- 10 In-cab coolant temperature gauge



One hundred and eleven degrees of carriage rotation.

As well as enabling bucket work this unique benefit makes handling goods much easier and safer. The Teletruk can also easily recover tipped or fallen loads, removing the requirement for manual handling and allowing attachments to operate effectively.




Bucket or forks can rotate 111 degrees for easier and faster material handling

Clear visibility from cab

By extending the boom forward both the Teletruk and operator are kept clear of hazards and danger.

Ramping performance.

The Teletruk's compact footprint and powerful hydrostatic transmission results in excellent performance up ramps and gradients, making it even more productive.

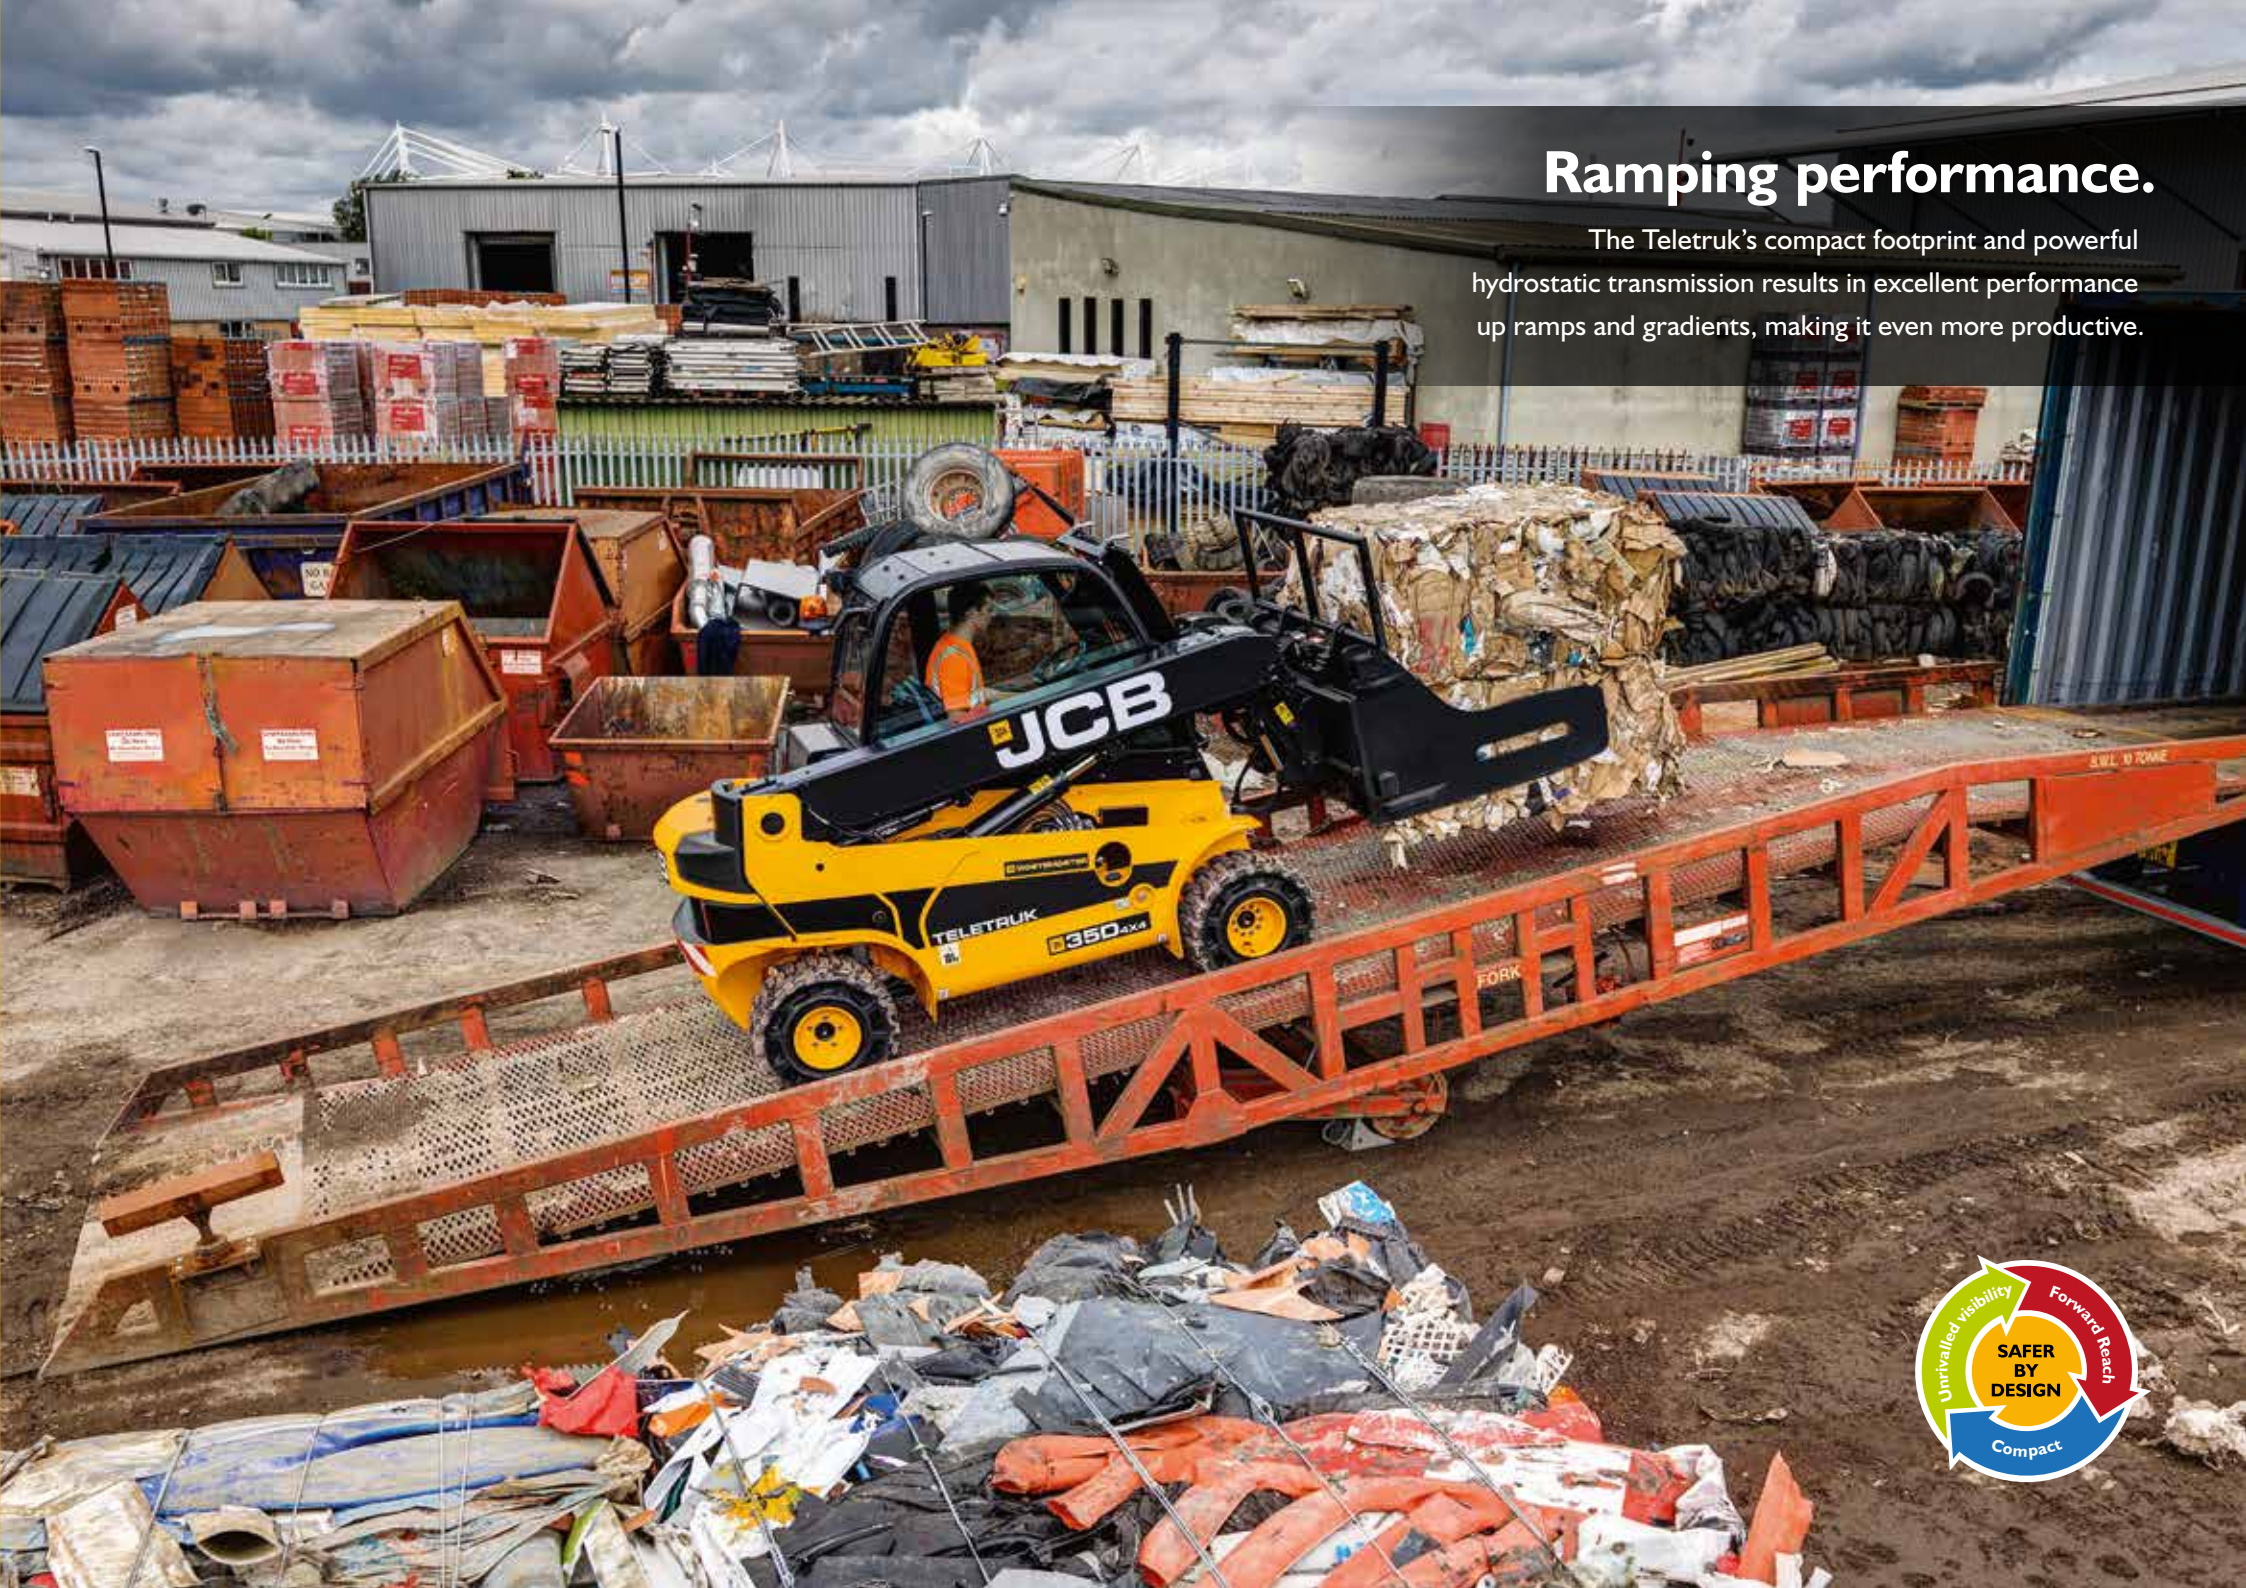

Forward reach.

The Teletruk's unique telescopic forward reach allows you to reach into reception areas without getting close to the hazardous materials being handled. With the same size footprint as a standard forklift, the Teletruk can also lift more weight than a standard forklift with long reach forks.



Full capacity to full lift height.

All the JCB Teletruk models in the Wastemaster range lift full rated capacity to full lift height due to the unique rear mounted telescopic boom. All lifts are protected by JCB's load motion control system aiding the prevention of forward tip.




Load Motion Control System.



Heavy reach capacity.

The heavy reach capacity of 2400kg at 2m forward reach makes the 35D 4x4 Teletruk, an ideal solution in any waste and recycling environment. All lifts are protected by JCB's load motion control system aiding the prevention of forward tip.

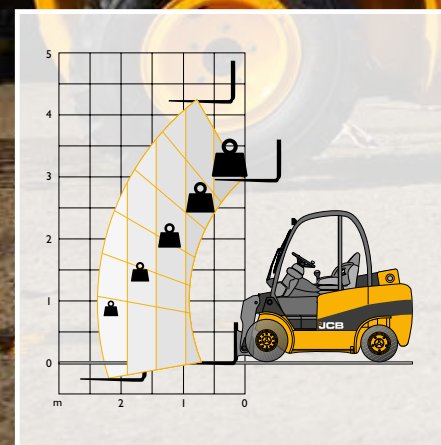



Compact and manoeuvrable.

The combination of a small footprint and a low turning radius makes the Teletruk the world's most versatile counterbalanced lift truck. With the boom retracted the JCB Teletruk has a turning radius of just 2.5m compared with a standard forklift with fork extensions at 3.7m.




Turning radius
from 2.5m

The unique telescopic
boom allows you to lift up
to 3500kg at 4.4m

Small footprint from 1.2m
for compact spaces

4WD for
uneven ground

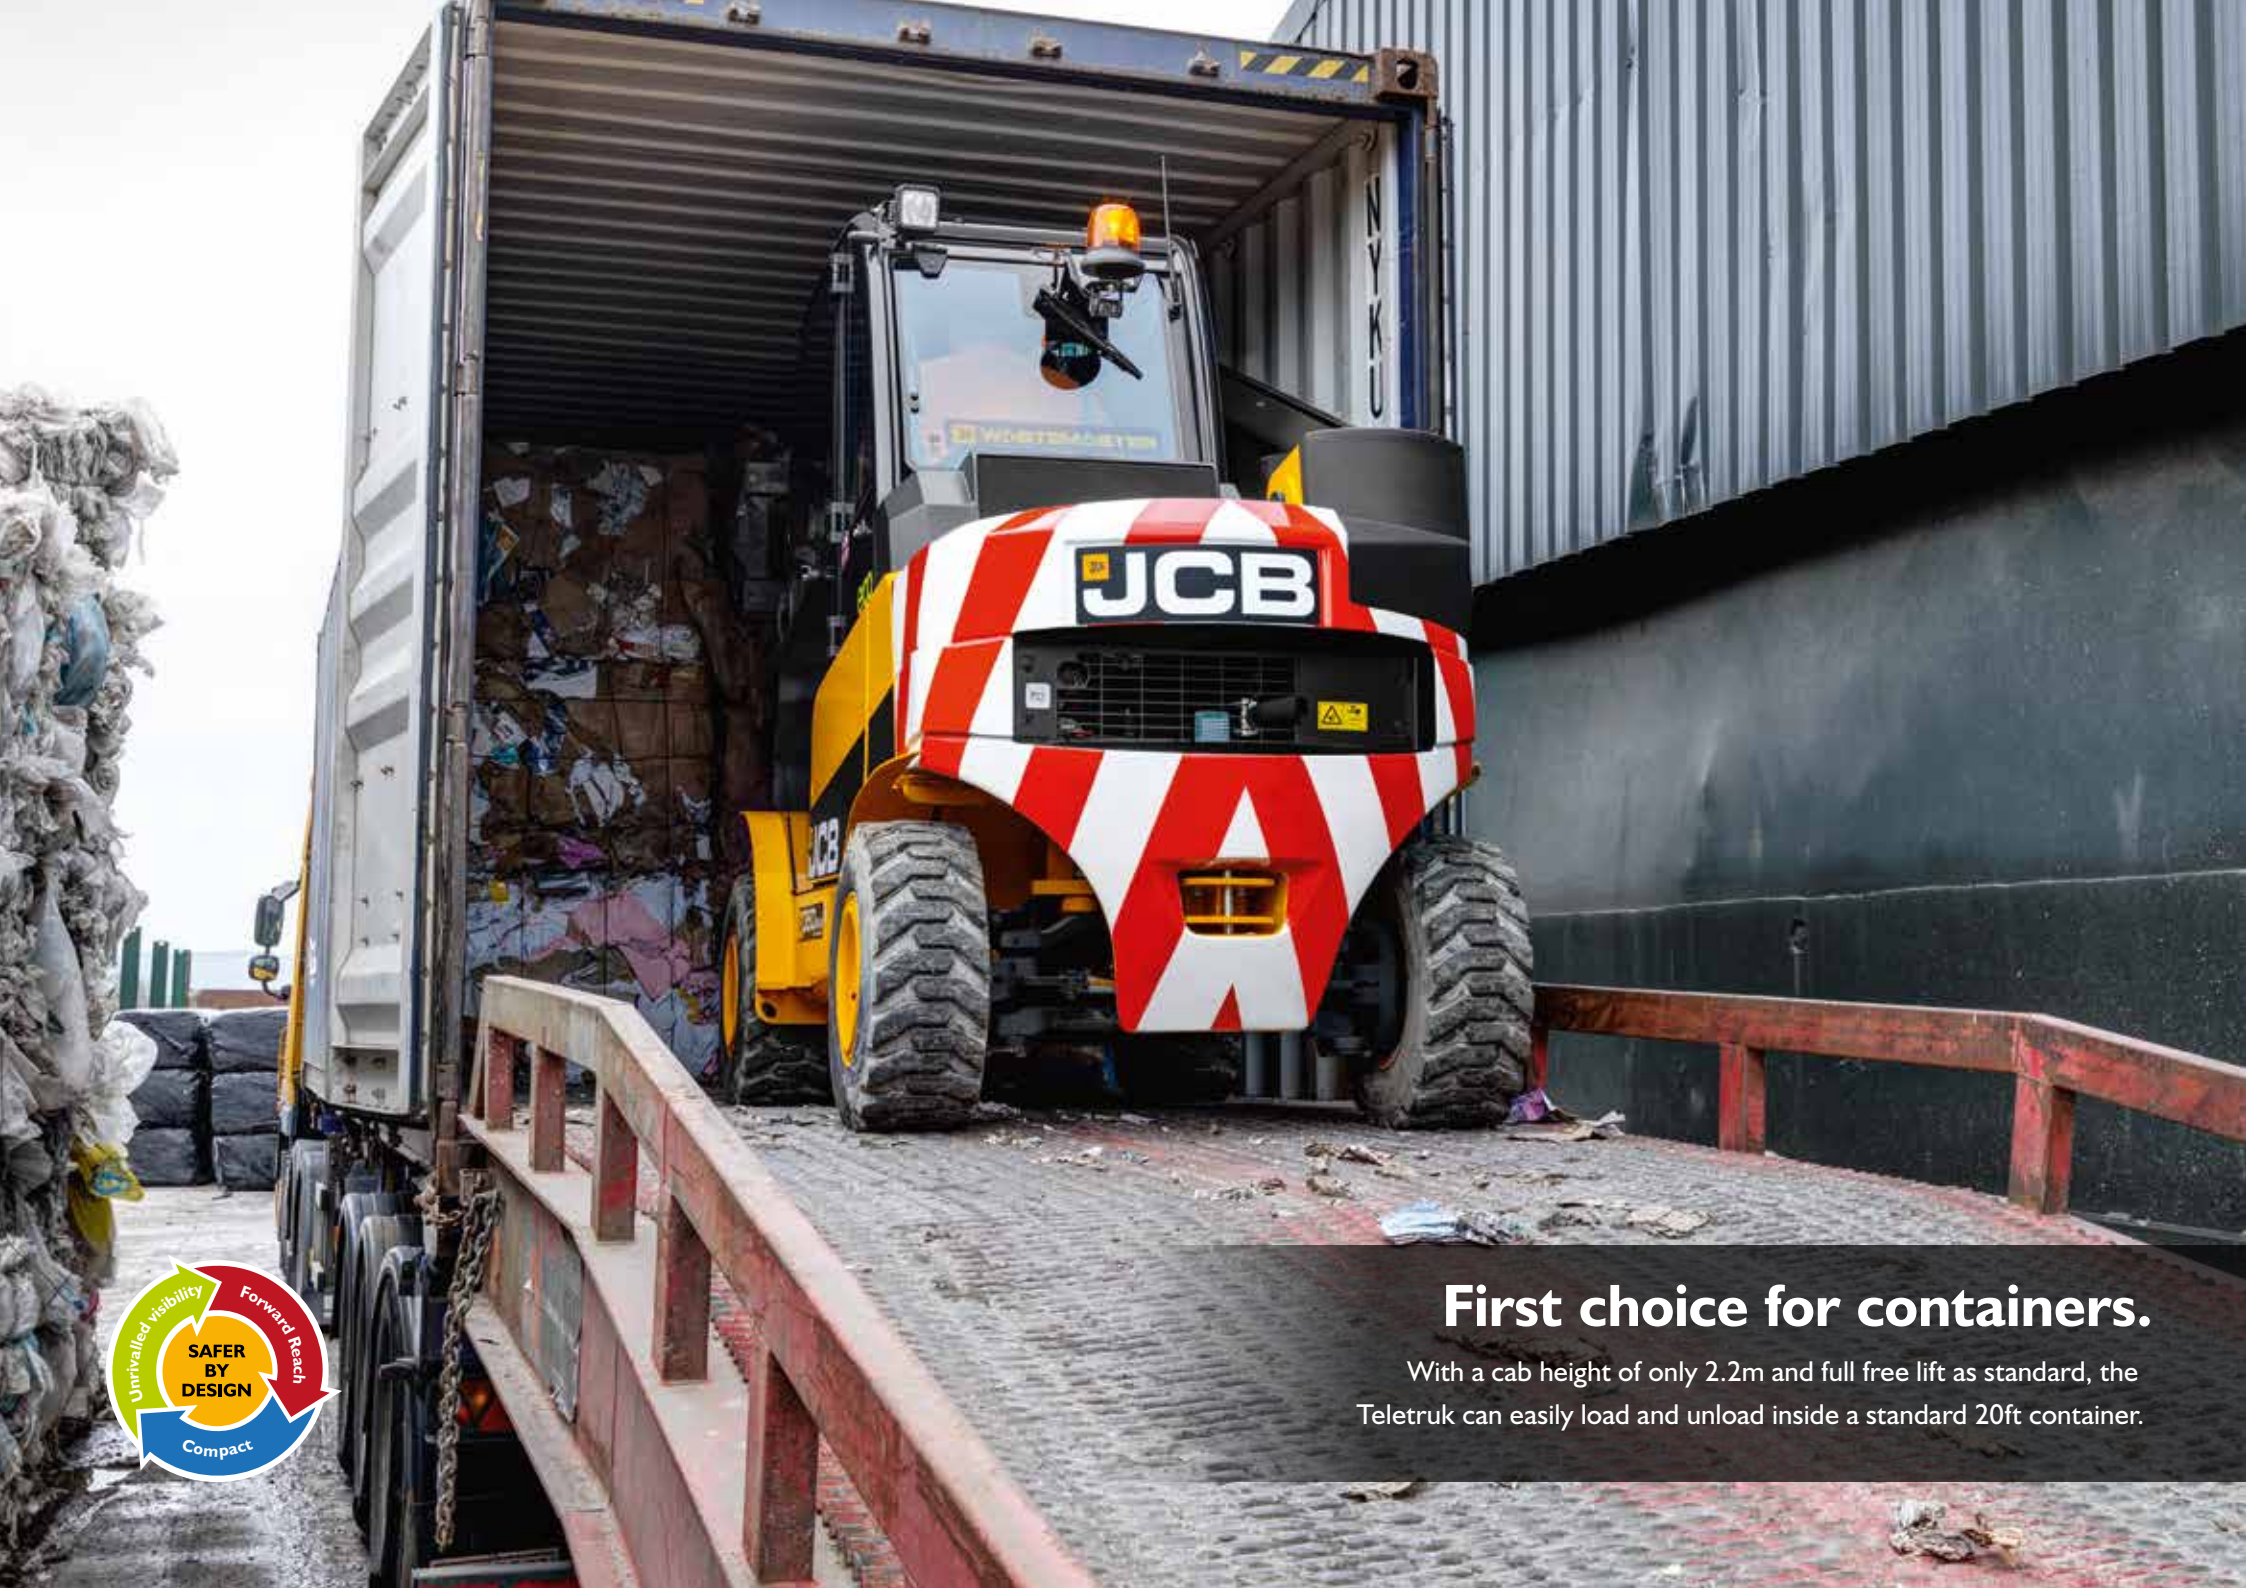

First choice for containers.

With a cab height of only 2.2m and full free lift as standard, the Teletruk can easily load and unload inside a standard 20ft container.

Safer by a long stretch.

With its unique telescopic reach, the JCB Teletruk enables pyramid bale stacking, which helps to prevent the bales falling over, improving on-site safety.




Growing your business.

JCB understands the unique requirements of the waste and recycling sector, which is why we designed our Wastemaster machines specifically to cope with them. Our 36-strong range is the widest of any manufacturer, so you can rest assured there's a Wastemaster for any application.



JCB TELETRUK VS STANDARD 3.0 TONNE FORKLIFT

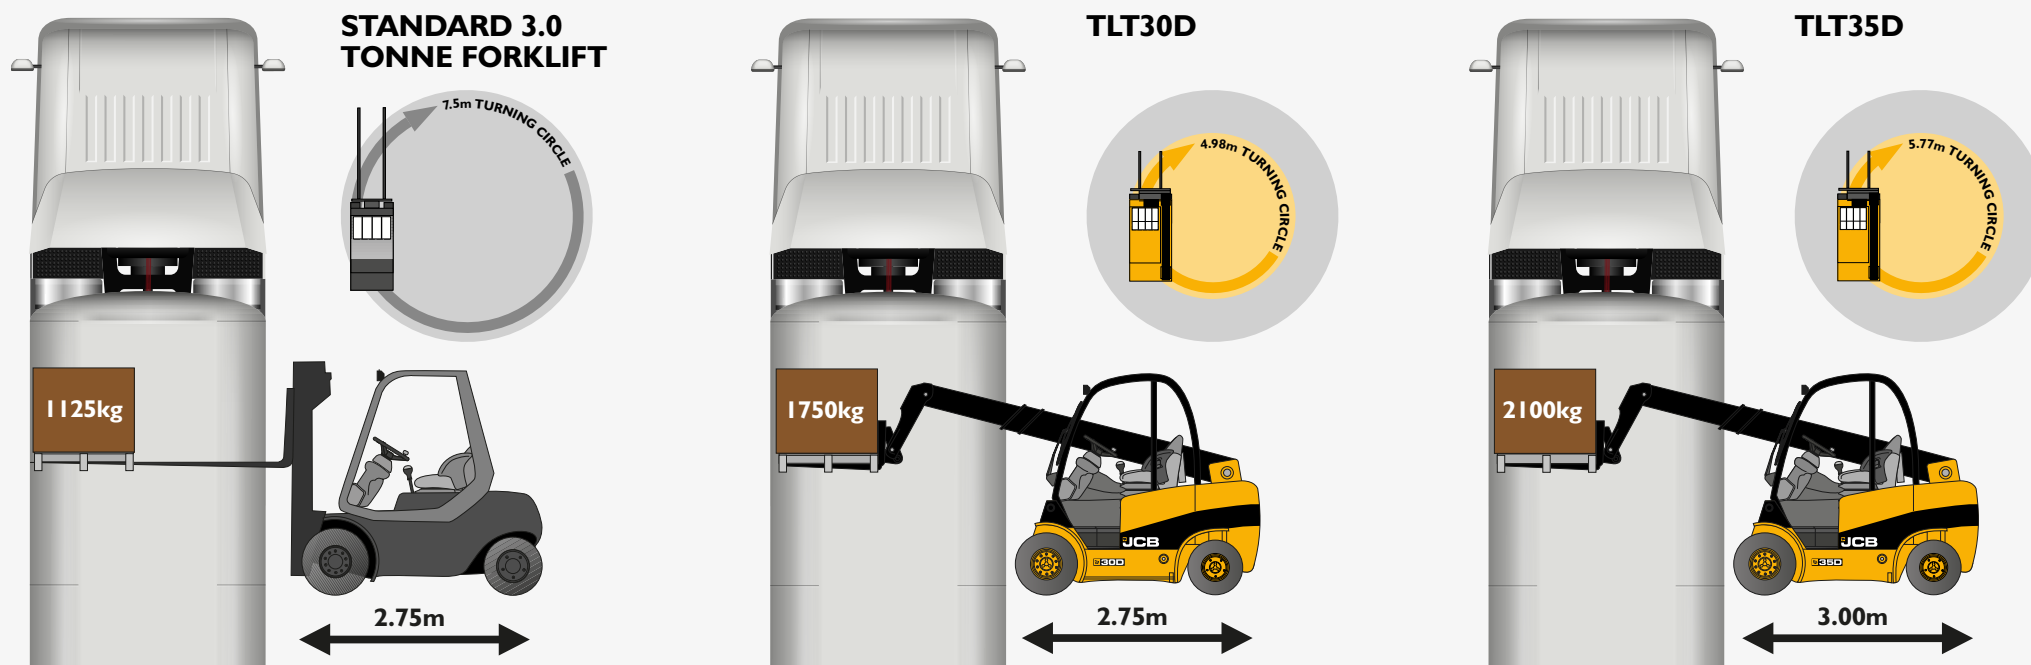

JCB TELETRUK SPECIFICATIONS		TLT30D WASTEMASTER	TLT35D WASTEMASTER	TLT30D 4x4 WASTEMASTER	TLT35D 4x4 WASTEMASTER
Maximum lift capacity	kg	3000	3500	3000	3500
Capacity @ 2m forwards reach	kg	1750	2100	2000	2400
Maximum lift height	mm	4000	4400	4000	4350
Maximum forward reach	mm	2390	2430	2390	2450
Turning radius	mm	2490	2885	2995	3500
Aisle width 90 degree stacking	mm	4005	4480	4510	5060
Overall height std/low (container ready*)	mm	2205*/2105*	2205*/2105*	2300/2200*	2300/2200*
Overall width	mm	1280	1280	1400	1400
Unladen weight	kg	4900	5100	5100	5500
Carriage rotation	degrees	111	111	111	111
Auxiliary flow rates (low/high)	l/min	28/70	28/70	28/70	28/70
Negative lift	mm	350	350	350	350



Your nearest JCB dealer

The JCB Teletruk Wastemaster Range

JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: salesinfo@jcb.com

Download the very latest information on this product range at: www.jcb.com

©2009 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. All images are correct at time of print. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

