# Dynapac F2500W

## Large pavers



## Technical data

### Masses

| | |
|---|---|
| Weight (incl. standard screed) | 17.50 t |

### Dimensions

| | |
|---|---|
| Basic width | 2.55 m |
| Working width, max. | 6.60 m |
| Working width, minimum (with reducing shoe) | 2.05 m |
| Front ramp angle | 17° |

### Capacity

| | |
|---|---|
| Placement thickness (max) | 300 mm |
| Theoretical placement capacity | 650 t/h |

### Material hopper

| | |
|---|---|
| Capacity | 6.0 m³ |
| Dumping height (center/outside) | 574 mm /587 mm |
| Hopper width, internal | 3142 mm |

### Traction

| | |
|---|---|
| Maximum paving speed | 30 m/min |
| Transport speed | 15.0 km/h |

### Engine

| | |
|---|---|
| Manufacturer/Model | Cummins QSB 6.7-C173 |
| Emissions according to | Stage IIIA (Tier 3) |
| Rated power | 110 kW @ 2200 rpm |
| Electrical system | 24V |
| Fuel tank capacity | 315 l |

### Undercarriage

| | |
|---|---|
| Final drive | Direct drive over transmissions |
| Tyre size | 445/80R25 |
| Front wheels | 4 x 560/300-390 |
| Wheel drive | 2 rear wheels |
| Turning radius (inside) | 2477 mm |
| Turning radius (outside) | 6065 mm |

### Conveyor

| | |
|---|---|
| Conveyor type | Dual bar feeder |
| Conveyor width | 2 x 580 mm |
| Conveyor control | The independent conveyor with proportional control |

### Auger

| | |
|---|---|
| Auger diameter | 380 mm |
| Auger control | Automatic with ultrasonic sensors |


Find us locally at www.dynapac.com


We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

# Dynapac F2500W

## Large pavers

## Technical data

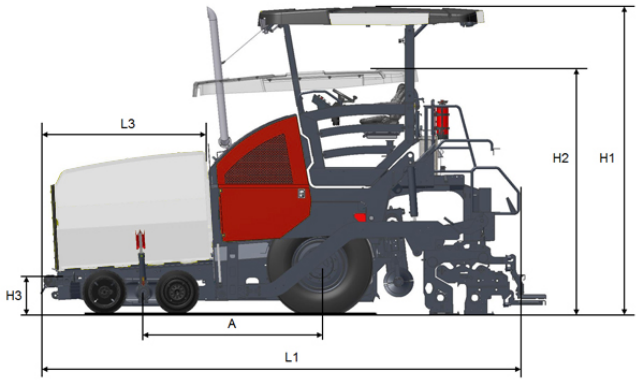

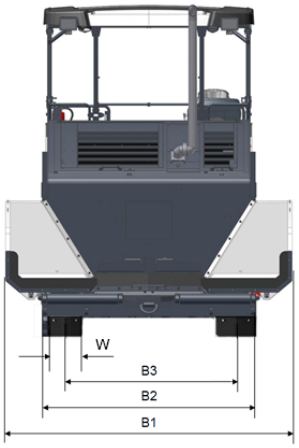
| Dimensions | |
|---|---|
| A. Wheelbase | 2,241 mm |
| B1. Width, max. | 3,250 mm |
| B2. Width, standard | 2,550 mm |
| B3. Width, wheel track | 2,053 mm |
| H1. Height, max. | 3,900 mm |
| H2. Height, transport | 3,100 mm |
| H3. Height | 493 mm |
| L1. Length | 6,100 mm |
| L3. Length, hopper | 2,123 mm |



We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.